

SJ4726/32

ELECTRIC SCISSORS



STANDARD FEATURES

- Drivable at full height
- Variable speed, rear wheel hydraulic drive
- Dual holding brakes
- SKYCODED™ Colour coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- Tilt sensor (3.5° x 1.5°)
- 1.22 m Roll out extension deck
- 24V DC Power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tyres
- Pothole protection system
- Wiring for AC outlet at platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down/lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Telematics ready
- White noise alarm
- Flashing light

OPTIONS

- Light duty pipe rack
- Heavy duty pipe rack
- Board carrier
- Tool caddy
- Dual flashing lights
- AGM Batteries
- Lockable swingout trays
- Full height spring hinged entry gate
- Bio oil
- Secondary Guarding Lift Enable (SGLE)
- ECOTRAY leak containment system
- ELEVATE telematics
- ELEVATE Battery Management System (BMS)*



† Standard lead times may be increased when optional equipment is added, consult factory.

‡ Capacities and machine weights may differ when options are added.

* Only available with ELEVATE telematics

SJ4726/32 ELECTRIC SCISSOR LIFT

Dimensions	SJ4726
A Work Height	9.82 m
B Raised Platform Height	7.82 m
C Lowered Platform Height	1.17 m
D Overall Width	1.19 m
E Overall Length	2.32 m
F Stowed Height (Rails Up)	2.29 m
G Stowed Height (Rails Down)	1.90 m
H Platform Width (Inside Dimension)	1.07 m
I Platform Length (Inside Dimension)	2.11 m
Specifications	SJ4726
Extension Deck (Roll Out)	1.22 m
Ground Clearance (Pothole Raised)	10.2 cm
Ground Clearance (Pothole Deployed)	1.8 cm
Wheelbase	1.75 m
Weight	2,135 kg
Gradeability	25%
Turning Radius (Inside)	0.71 m
Turning Radius (Outside)	2.64 m
Lift Time (With Rated Load)	52 sec
Lower time (With Rated Load)	32 sec
Drive Speed (Stowed)	2.9 km/h
Drive Speed (Raised)	1.0 km/h
Maximum Drive Height	Full Height
Capacity (Overall)	454 kg
Distributed Capacity (Main Platform)	318 kg
Distributed Capacity (Extension Deck)	136 kg
Local Floor Load (With Rated Load)	856 kN/m ²
Overall Floor Load (With Rated Load)	998 kg/m ²
Maximum # of persons at 0 m/s wind rating	3
Maximum # of persons up to 12.5 m/s wind rating	1
Tyre Type	Solid, N/M
Tyre Size	16 x 5 x 12

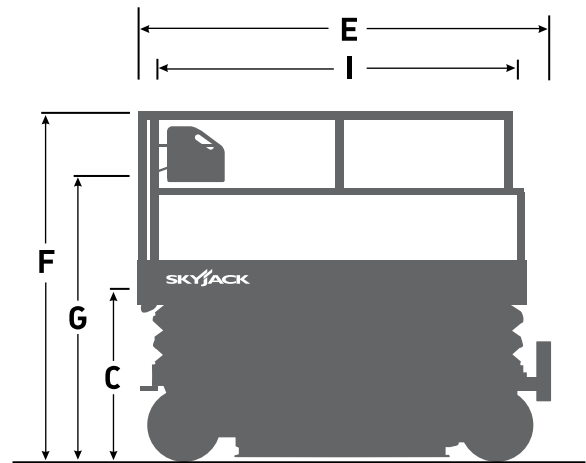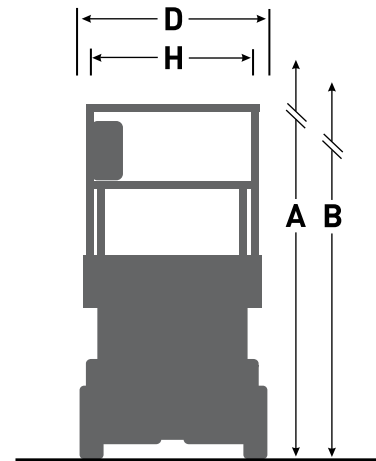

Skyjack Australia Pty Ltd
 Unit 1, 35 Honeycomb Drive
 Eastern Creek
 NSW 2766
 Australia
 Phone +61 (0) 2 9854 0700
 Fax +61 (0) 2 9854 0777
 Email: jcranmer@skyjack.com

www.skyjack.com

SKYJACK
 simply reliable™